


data sheet: H7M130

Kroepin GmbH
Gartenstraße 50
D-36381 Schlüchtern

Tel.: 06661 86 0
Fax: 06661 86 39
Mail: sales@kroepin.com
Web: www.kroepin.com

Kroepin
Längenmesstechnik

comparison measurement

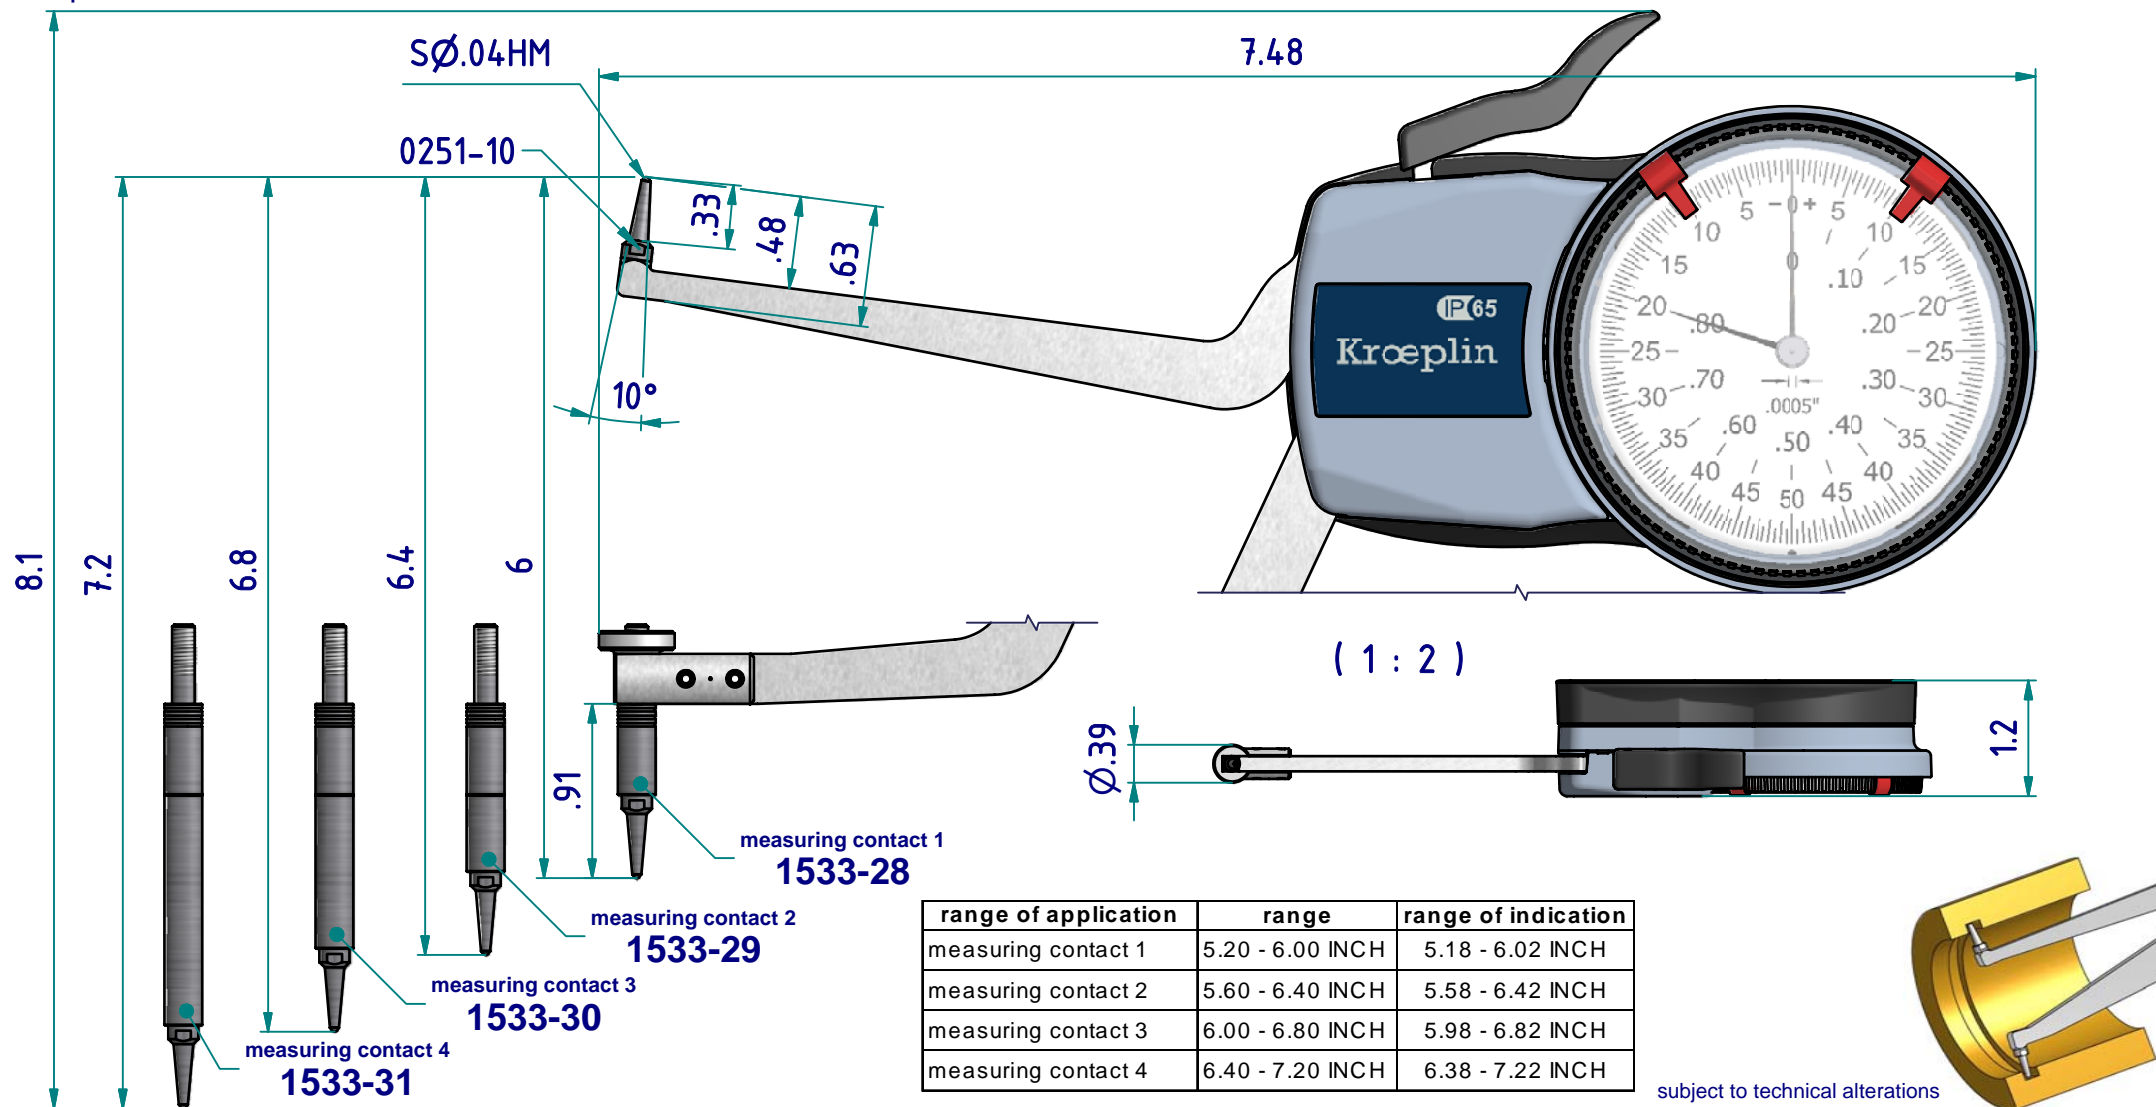

subject to technical alterations

type: H
range: see table
range of indication: see table
digital step: -
scale interval: $.0005$ INCH
measuring force: 1,1 - 1,6 N
weight: 240 g

acceptable deviations
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)
max. permissible errors "G": $.0015$ INCH
repeatability "r": $.001$ INCH
reference temperature: $20^{\circ}C$
operation temperature: $10^{\circ}C - 30^{\circ}C$
storage temperature: $-10^{\circ}C - 50^{\circ}C$

scale: 1:1
drawing-nr.: DAB-H7M130_KR_I
date of issue: 14.01.09
name: T.Koenig
revision status: 001
revision date: 17.02.2010

data sheet: H7M130

Kroeplin GmbH
Gartenstraße 50
D-36381 Schlüchtern

Tel.: 06661 86 0
Fax: 06661 86 39
Mail: sales@kroeplin.com
Web: www.kroeplin.com


Kroeplin
Längenmesstechnik

		measuring ranges M_{eb} [INCH]										
measuring contact 1 :	5.12	5.20	5.28	5.35	5.43	5.51	5.59	5.67	5.75	5.83	5.91	
measuring contact 2 :	5.51	5.59	5.67	5.75	5.83	5.91	5.98	6.06	6.14	6.22	6.30	
measuring contact 3 :	5.91	5.98	6.06	6.14	6.22	6.30	6.38	6.46	6.54	6.61	6.69	
measuring contact 4 :	6.30	6.38	6.46	6.54	6.61	6.69	6.77	6.85	6.93	7.01	7.09	
groove depth A [INCH]	0	0 / 3.21	0 / 3.24	0 / 3.26	0 / 3.30	0 / 3.37	0 / 3.41	0 / 3.43	0 / 3.44	0 / 3.44	0 / 3.46	0 / 3.48
	.04		.06 / 3.22	.06 / 3.25	.06 / 3.28	.06 / 3.32	.06 / 3.39	.06 / 3.42	.06 / 3.43	.06 / 3.44	.06 / 3.44	.06 / 3.45
	.08			.07 / 3.23	.07 / 3.26	.07 / 3.29	.07 / 3.35	.07 / 3.4	.07 / 3.42	.07 / 3.43	.07 / 3.43	.07 / 3.44
	.12				.07 / 3.24	.07 / 3.27	.07 / 3.31	.07 / 3.37	.07 / 3.41	.07 / 3.42	.07 / 3.43	.07 / 3.43
	.16					.08 / 3.25	.08 / 3.28	.08 / 3.33	.08 / 3.39	.08 / 3.41	.08 / 3.41	.08 / 3.42
	.20						.09 / 3.26	.09 / 3.29	.09 / 3.35	.09 / 3.39	.09 / 3.41	.09 / 3.41
	.24							.09 / 3.26	.09 / 3.30	.09 / 3.36	.09 / 3.39	.09 / 3.40
	.28								.10 / 3.27	.10 / 3.31	.10 / 3.36	.10 / 3.39
	.31									.11 / 3.28	.11 / 3.31	.11 / 3.38
		B / L										

B = minimum groove width [INCH]
L = maximum usable arm length [INCH]

Example: $M_{eb} = 6.54$ $B = .07$
 $A = .08$ $L = 3.26$

measuring capacity

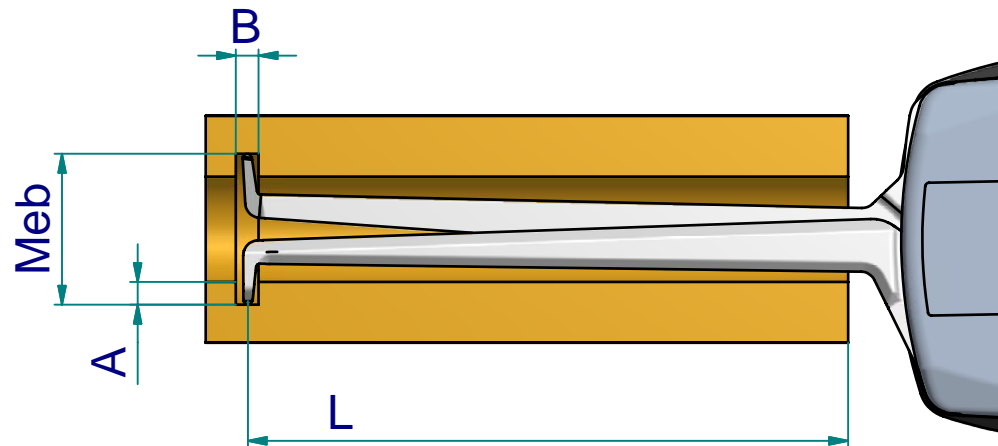

subject to technical alterations

drawing-nr.:	DAB-H7M130_KR_I
date of issue:	14.01.09
name:	T.Koenig
revision status:	
revision date:	